

DELHI DEVELOPMENT AUTHORITY
ELECTRICAL DIVISION NO:07

Press Tender Notice No: 06 / EE / ED-7 / DDA / 2008-09


Sealed item rate tender are invited for the following works by the Executive Engineer (Elect.) Elect. Divn.7 / DDA, Keshavpuram, Delhi-110035 upto 3:00 PM on behalf of D.D.A. from the approved contractor of appropriate class of DDA, CPWD, MES, P&T, Railway and which shall be opened on the same day at 3:30 PM at Ground Floor, Vikas Minar, DDA Office, I.P. Estate, New Delhi in the presence of intending purchaser of their authorized representatives.

The tender documents can be held on any working day from the office of CAU/NZ/DDA, Ashok Vihar, Sale Counter Vikas Minar, New Delhi between the 11:00 to 3:00 PM on payment of amount of mentioned against each work (non refundable) on production of enlistment registration certificate and valid registration with works contract cell of Sales Tax Department of G.N.C.T.D. and tax clearance certificate issued by the works contract cell in Form-XI as well as the amount earnest money the shape of cash receipt treasury challan / deposit as call receipt of scheduled bank fixed deposit receipt of a scheduled bank / demand draft of scheduled bank in favour of Sr. A.O. / CAU / N.Z. / DDA sales of tenders form will be stopped four days (including the date of opening) before the date fixed for the opening of tender documents.

The manner of submission of tenders opening of the same and entry of contractor's. Their authorized representative to the place of opening shall be as provided in clause 3(a), (b) & 3(c) of PWD-6 forming part of tender.

S. No.	NIT NO.	Name & Address	Name of Work	Estimated Cost Earnest Money	Tendered Cost Time Allowed	Date of Sale Date of Opening
1.	30/ EE/ED-7/DDA/2008-09	Executive Engineer (Elect) Electrical Division No.-7 Delhi Development Authority Keshavpuram, Delhi	M/o Pump set at various colonies under N.Z. SH: Maintenance of street light at C/o 80 MIG & 64 EWS/Janta houses at Land between Kalyan Vihar & C.C. Colony.	Rs.274464/- Rs.5489/-	Rs.500/- Twelve Month	13.10.08 17.10.08

Budget Slip No: CAU/NZ/DDA/08-09/ED-7/120 dt. 24.9.08 for Rs.2.74 lacs.


for **Executive Engineer (Elect)**
Electrical Division No.-7
Delhi Development Authority

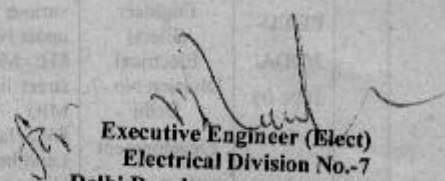
contd...2/-

No:F.71(6)A/C/ED-7/DDA/2007-08/ 1348

DL8.10.08

Copy to:

1. C.E.(Elect.)/DDA for information please.
2. F.O. TO C.E.(Elect.)/DDA for information please.
3. S.E.(Elect.) Elect. Circle-2/DDA for information please.
4. E.E.(Elect.)/Elect. Divn.1 to 6 & 8 to 12/DDA.
5. Executive Engineer /WD-5/DDA Vikas Minar,
6. A.O.(Work)/DDA
7. Sr. A.O.(CAU)NZ/DDA
8. All AE's/AE(P)/ED-7/DDA
9. Head Clerk/ED-7/DDA
10. Security Officer, Vikas Minar, DDA.
11. Tender Clerk/CAU/NZ/DDA & Tender Clerk./Vikas Minar, DDA
12. DDA Builder Association (Regd.) C-29, Panchsheel Enclave, Delhi.
13. Contractor Welfare Association (Regd.) E-18, Vikas Kuteer, New Delhi.
14. DDA Contractor Association (Regd.) near entrance barrack Vikas Kuteer, I.P. Estate, New Delhi.
15. The Secy. Contractor Welfare Association (Regd.) Y-Shape Building, I.P. Estate New Delhi
16. The Secy. Contractor Welfare Association (Regd.) Arya Samaj Bazar, Sita Ram, Delhi
17. The Association Elect. Contractor (Regd.) 41-A. Mayapuri Indl. Area, Ph-II, New Delhi.
18. Trans Yamuna DDA Contractor Association (Regd.), a 11-12, Vir Savarkar Market, Budh Bazar, Gandhi Nagar, Delhi.
19. Delhi Contractor Association (Regd.) 88-B, First Floor, Jwala Heri Market, Paschim Vihar, New Delhi.
20. Delhi Contractor Welfare Association (Regd.), 79, Triveni Apartment, New Police Station, Vivek Vihar, Delhi.
21. E-Mail Address: ddatender@org.in


Executive Engineer (Elect)
Electrical Division No.-7
Delhi Development Authority

**DELHI DEVELOPMENT AUTHORITY
ELECTRICAL DIVISION-7**

NAME OF WORK:- M/o Pump Set in Various places under North Zone.

[SH:- Maintenance of Street Light at Co 80 MIG & 64 EWS / Janta Houses at land between Kaayan Vihar & C.C.Colony.]

S.No.	Description of item	Qty.	Unit	Rate Rs. = Ps	Amount Rs. = Ps
1	Operation & maintenance of Street Lighting as per terms and conditions attached.....Job.	12Months	Month		
2	Supplying & replacement of following damaged / defective street light accessories from th: existing 70Watts HPSV lamp fitting / connection box installed on the steel tubular pole i/c connections, inter connections, earthing the body & testing etc. as required. (a) 70 Watt HPSV lamps. (b) Copper wound choke / ballast suitable for 70 Watt HPSV lamps. (c) Electronic igniter suitable for 70 Watt HPSV lamps. (d) Capacitor suitable for 70 Watt HPSV lamps. (e) 6 Amms S.F., M.C.B. "C" Characteristics curve M.C.B.	20 Nos. 15Nos. 15Nos. 15Nos. 15Nos.	Each Each Each Each Each		
3	Supply of 2X10 sq. mm. size of XLPE armoured aluminium conductor power cable of 1.1KV grade i/c testing etc. as reqd.	300Mtrs.	Mtr.		
4	Laying of one number PVC insulated and PVC sheathed / XLPE armoured aluminium conductor power cable of 1.1KV grade of size not exceeding 25sq.mm direct in ground i/c excavation & refilling the trench etc. as reqd. but excluding sand cushioning & protective coveringthe paca path and refilling the trench etc. as required	250Mtrs.	Mtrs.		
5	Laying of one number of PVC insulated and PVC sheathed/XLPE power cable of 1.1 KV grade of size not exceeding 25 mm ² in the existing RCC / Hume / Stone Ware / Metal pipe as required.	50Mtrs.	Mtr.		

6	Painting & numbering of steel tubular poles of 7 Mtrs. height w/ its overhangs, connector boxes etc. with double coat of aluminium / enamel / Poly Uthecrene paint of approved shade after cleaning the surface etc. as required.	30 Nos.	Each		
7	Spray painting & numbering of feeder pillar with enamel paint of approved shade after cleaning the surface etc. as required.	2 Nos.	Each		
				Total	

Sd/-
Executive Engineer (Elect.)
Electrical Division Mo-7/DDA

NAME OF WORK: - M/o Pump Set in Various places under North Zone.
[SH: - Maintenance of Street Light at C/o 80 MIG & 64 EWS / Janta Houses at land between Kalyan Vihar & C.C.Colony.]

Part-A

- (i) ... Nil.....H.P. Centrifugal pump set
- (ii) ... Nil...H.P. vacuum pump for priming of above pump set
- (iii) Control panel comprising of.....Nil.....
- (iv) Details of valves.....Nil.....
- (v) Water level indicator.....Nil.....

Part-B

- (i) D. G. Set
- (a) Capacity.....Nil.....KVA
- (b) Control panel comprising of.Nil.....

Part-C

- (i) Submersible pumps
- (a)Nil.....H.P. Submersible pumpset.....Nil.....Nos.
- (b) Control panel comprising of.....Nil.....

Part-D

- (i) **External Electrical Installation.**
 - (a) Service connection cable from electric panel board to sub. P/Set feeder pillar approx.60 mtrs.
 - (b) Service connection cable from sub. P/Set feeder pillar to street light electric feeder pillar approx. 5 mtrs.
 - (c) 30Nos street light pole complete with 70 Watt HPSV lamps fitting & connection box, barbed wire on the periphery of pole along with Service / circuits connection cable from street light electric feeder pillar to poles (30Nos.) approx. 600mtrs.
- (ii) Control panel [Street lighting] comprising of 4strip B.B.C.—1set, 1No 100Amps T.P. &N MCB, 3Nos 32Amps D.P. MCB, 63 Amps. A.C. Connector-1No., Danger notice plate-1No.

Sd/-

Executive Engineer (Elect.)

Electrical Division No.7

Delhi Development Authority

NAME OF WORK: - M/o Pump Set in Various places under North Zone.
[SH: - Maintenance of Street Light at C/o 80 MIG & 64 EWS / Janta Houses at land
between Kalyan Vihar & C.C.Colony.]

TERMS AND CONDITIONS

1. The work comprises of maintenance of street lighting as per the inventory attached.
2. Scope of work is as under:
 - i. To keep all street lighting points & all allied installations in working order.
 - ii. To keep the street lighting functional during the timing fixed by the Engineer-in-charge.
 - iii. Street lighting should be switched ON / OFF at appropriate time fixed by the department.
3. 90% of street lighting should remain in working order & functional through out the period of contract failing which proportionate recovery shall be made from the contractor's bill.
4. No street lighting points should remain out of order for more than 3 days. Beyond 3 days, a recovery of Rs.50/= per point, per day, shall be made from the contractor's bill.
5. For laying of cable in pacca portion & removing of existing damaged / defective cable, payment will be made as per item No. 4 of schedule of work and no extra payment shall be made on this account.
6. Proper handing / taking over of all the E & M installations shall be carried out by JE (E) / AE (E) in-charge of the work and the contractor in writing immediately after award of work / before start of work. The same shall be handed over to the department in proper working condition after expiry of the contract.
7. The contractor shall depute the following staff under the contract.
 - a. Operator Grade-II ----1No. (from 2.00 P.M. to 10.00 P.M.)
 - b. Khallasi---2Nos. (from 2.00 P.M. to 10.00 P.M.)
 - c. Wireman ---1No. At least once in a week
8. The duty timings of the staff can be changed as and when required by the Engineer-in-charge.
9. The contractor shall deploy trained and competent staff to the satisfaction of Engineer-in-Charge.
10. The contractor shall supply the list of staff along with details i.e. Name, Father's Name, Date of Birth, Experience Certificates to be engaged on the installation within 7 days of award of work. Engineer-in-Charge shall have the right to reject any staff deployed by the contractor.
11. The staff deployed by the contractor shall wear proper uniform and badges displaying their name and designation.
12. The contractor shall deploy staff throughout the period of contract including Saturday, Sunday, Gazetted holidays and National holidays and shall maintain attendance register which shall be kept at office of J.E. (E) concerned.
13. The contractor shall submit the log sheet as per the Performa enclosed regarding the status of street lighting points and other allied installations of the proceeding day, daily to the Engineer-in-charge in the division office, duly signed by him or his authorized representative whose particulars shall be furnished by the successful tenderer within 7 days after award of work.
14. If any staffs deployed by the contractor is found absent on a particular time and date, an amount of equal to minimum wages fixed by Delhi Administration from time to time shall be recovered from the contractor's bill.
15. In case of disobedience or misbehaviour by the operational staff of the contractor, the Engineer-in-Charge may ask the contractor to dispense with the services of such staff with immediate effect. The contractor shall provide suitable substitute simultaneously.
16. The contractor shall take all safety measures at site during maintenance of the installations.

17. Any injury / mishap to the maintenance staff during duty hours will solely be the liability of contractor.
18. The contractor shall maintain the street light luminaries with wheel ladder / motorized ladder only.
19. Co-ordination and follow up action with electric supply agency shall be done by the contractor in case of failure / fault in supply.
20. The contractor shall intimate the Engineer-in-Charge about the major breakdown or failure of electric supply immediately.
21. The following minor maintenance including preventive maintenance shall be carried out by the contractor. The details of work carried out shall be recorded in the register.
 - a. Supply & replacement of kit kat and MCB's as & when required.
 - b. Supply & replacement of thimbles & ferrules as & when required.
 - c. Supply & replacement of copper wire of size 2.5 sq. mm as & when required.
 - d. Supply & replacement of HRC fuses as and when required.
22. All electric connections shall be checked at least once in a month & set right, if required.
23. The contractor has to return the dismantled material to the department after replacing the defective items at site for which separate payments are being made by the department.
24. In case any damages / loss is done to the installation during the contract period, the contractor shall have to make good the damages / loss at his own cost except the damages to the installations by accident.. In case the contractor fails to rectify the damages / loss within reasonable time, the same shall be got rectified / replaced by the department at the risk and cost of the contractor.
25. If at any stage, the timer switch provided in the feeder pillar does not function, the contractor shall make immediate arrangement for ON / OFF operation manually till the timer switch is got repaired / replaced. Nothing extra shall be paid on this account.
26. Item No. 2, 3, 4 & 5 shall be executed as & when required and these shall be executed in the presence of authorized representative of Engineer-in-charge.
27. The following makes of materials are acceptable:

a) HPSV lamp	Phillips / Osram
b) Ballast	As per fitment of manufacturer of existing luminaire.
c) Ignitor	As per fitment of manufacturer of existing luminaire.
d) MCB's	MDS / standard / Action / L&T / Indokopp
e) Copper wire	National / Ecko / Havells / Skytone
f) Paint	
i) Enamel / Aluminium	Berger / Narolac / Asian / Dulux
ii) Poly Utherene	MRF /
g) XLPE armoured cable	Asian Cable / Unistar / Ecko / Nicco / Skytone
28. The contractor shall also be responsible for removal of unauthorized hoarding, banners, if any, on the poles during the contract period for which the Engineer-in-charge / authorized representative shall render their assistance, if required.
29. Testing of earth continuity and earth electrodes shall be carried out once in a year by contractor in the presence of authorized representative of the Engineer-in-charge.
30. The rates quoted by the contractor shall be inclusive of all taxes, duties and Govt. levies etc.
31. The Engineer-in-Charge, if so desire, may extend the contract upto 2 months or terminate the contract at any time after giving 15 days notice for which no compensation shall be paid..

Sd/-

Executive Engineer (Elect.) Electrical
Division No.7
Delhi Development Authority